

# DUPLEXER

## 136 - 174 / 380 - 520 MHz


**BDA-DBC-12**

### Product Applications

- Guaranteed Parameter Compliance
- Wide Frequency Band Coverage
- Low Insertion Loss
- Low VSWR
- Indoor or Outdoor Using IP65
- Available with Type N, 7/16DIN or 4.3/10 Type Connectors



Specification	Value
Frequency(MHz)	CH1: 136-174 MHz CH2: 380-520 MHz
VSWR	≤1.30
Insertion Loss	≤0.7 dB
Isolation	≥50 dB
Impedance	50 ohm
Power Rating	50W (average Per Port)
Operating Temperature (deg)	-40~+85°C
Connector	N-female
Relative Humidity	5%-95%
Weight	0.38KG

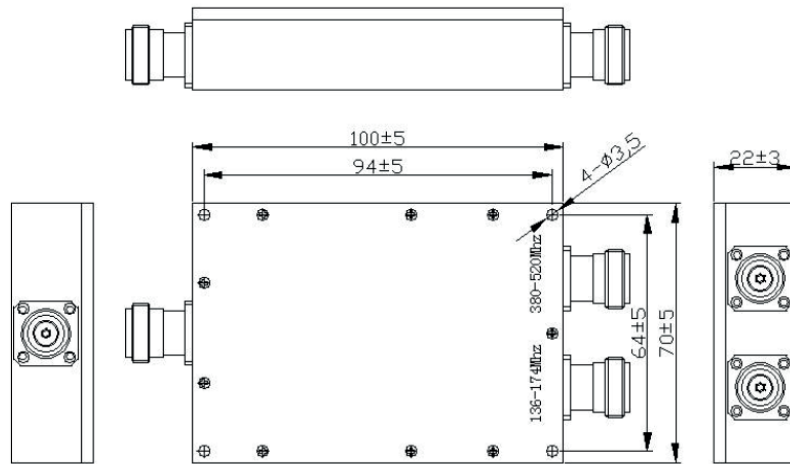

DOC HON-62071.01 • 10202020

**Honeywell Business Solutions**  
 715 Peachtree Street NE  
 Atlanta, GA 30308  
 www.honeywell.com

HON-62071.01 • 10202020  
 ©2020 by Honeywell International Inc. All rights reserved.  
 Unauthorized use of this document is strictly prohibited.  
 This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.  
 Country of origin: U.S.A.

**THE  
 FUTURE  
 IS  
 WHAT  
 WE  
 MAKE IT**

**Honeywell**