

DUPLEXER

135 - 520 / 690 - 2700 MHz


BDA-DBC-22

Product Applications

- Guaranteed Parameter Compliance
- Wide Frequency Band Coverage
- Low Insertion Loss
- Low VSWR
- Indoor or Outdoor Using IP65
- Available with Type N, 7/16DIN or 4.3/10 Type Connectors



Specification	Value
Frequency(MHz)	CH1: 135-520 MHz CH2: 690-2700 MHz
VSWR	≤1.40
Insertion Loss	≤1.0 dB
Isolation	≥35
Impedance	50 ohm
Power Rating	50W (average Per Port)
Operating Temperature (deg)	-40~+85°C
Connector	N-female
Relative Humidity	5% -95%
Weight	1.7 KG

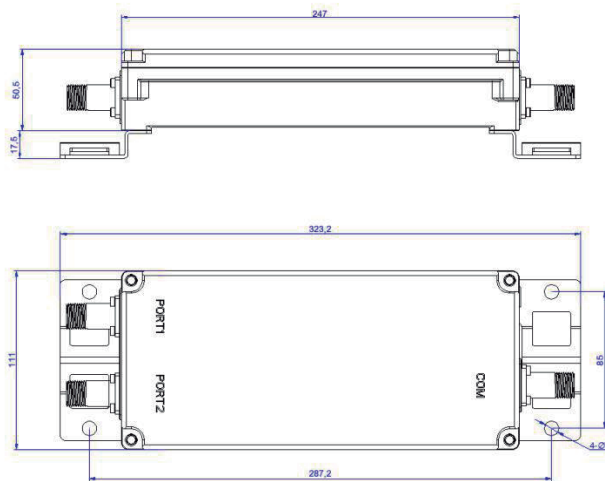

DOC HON-62072.01 • 10202020

Honeywell Business Solutions
 715 Peachtree Street NE
 Atlanta, GA 30308
 www.honeywell.com

HON-62072.01 • 10202020
 ©2020 by Honeywell International Inc. All rights reserved.
 Unauthorized use of this document is strictly prohibited.
 This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
 Country of origin: U.S.A.

**THE
 FUTURE
 IS
 WHAT
 WE
 MAKE IT**

Honeywell